

Chapter NR 252

LEATHER TANNING AND FINISHING

NR 252.01	Purpose.	NR 252.51	Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd.
NR 252.015	Applicability.		
NR 252.02	General definitions.	NR 252.52	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.
NR 252.03	Sulfide analytical method.		
NR 252.035	Potassium ferricyanide titration method.	NR 252.53	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.
NR 252.036	Modified Monier-Williams method.		
NR 252.0365	Method detection limit method.	NR 252.54	New source performance standards cNSPSd.
NR 252.04	Applicability of sulfide pretreatment standards.	NR 252.55	Pretreatment standards for existing sources cPSESd.
NR 252.05	Compliance date for pretreatment standards for existing sources cPSESd.	NR 252.56	Pretreatment standards for new sources cPSNSd.
NR 252.06	Monitoring requirements.	NR 252.60	Applicability; description of the through-the-blue subcategory.
NR 252.10	Applicability; description of the hair pulp, chrome tan, retan-wet finishing subcategory.	NR 252.61	Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd.
NR 252.11	Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd.	NR 252.62	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.
NR 252.12	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.	NR 252.63	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.
NR 252.13	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.	NR 252.64	New source performance standards cNSPSd.
NR 252.14	New source performance standards cNSPSd.	NR 252.65	Pretreatment standards for existing sources cPSESd.
NR 252.15	Pretreatment standards for existing sources cPSESd.	NR 252.66	Pretreatment standards for new sources cPSNSd.
NR 252.16	Pretreatment standards for new sources cPSNSd.	NR 252.70	Applicability; description of the shearing subcategory.
NR 252.20	Applicability; description of the hair save, chrome tan, retan-wet finish subcategory.	NR 252.71	Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd.
NR 252.21	Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd.	NR 252.72	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.
NR 252.22	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.	NR 252.73	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.
NR 252.23	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.	NR 252.74	New source performance standards cNSPSd.
NR 252.24	New source performance standards cNSPSd.	NR 252.75	Pretreatment standards for existing sources cPSESd.
NR 252.25	Pretreatment standards for existing sources cPSESd.	NR 252.76	Pretreatment standards for new sources cPSNSd.
NR 252.26	Pretreatment standards for new sources cPSNSd.	NR 252.80	Applicability; description of the pigskin subcategory.
NR 252.30	Applicability; description of the hair save or pulp, nonchrome tan, retan-wet finish subcategory.	NR 252.81	Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd.
NR 252.31	Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd.	NR 252.82	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.
NR 252.32	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.	NR 252.83	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.
NR 252.33	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.	NR 252.84	New source performance standards cNSPSd.
NR 252.34	New source performance standards cNSPSd.	NR 252.85	Pretreatment standards for existing sources cPSESd.
NR 252.35	Pretreatment standards for existing sources cPSESd.	NR 252.86	Pretreatment standards for new sources cPSNSd.
NR 252.36	Pretreatment standards for new sources cPSNSd.	NR 252.90	Applicability; description of the retan-wet finish-splits subcategory.
NR 252.40	Applicability; description of the retan-wet finish-sides subcategory.	NR 252.91	Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd.
NR 252.41	Effluent limitations representing the degree of effluent reduction attainable by the control technology currently available cBPTd.	NR 252.92	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.
NR 252.42	Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd.	NR 252.93	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.
NR 252.43	Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd.	NR 252.94	New source performance standards cNSPSd.
NR 252.44	New source performance standards cNSPSd.	NR 252.95	Pretreatment standards for existing sources cPSESd.
NR 252.45	Pretreatment standards for existing sources cPSESd.	NR 252.96	Pretreatment standards for new sources cPSNSd.
NR 252.46	Pretreatment standards for new sources cPSNSd.	NR 252.99	Cross-references.
NR 252.50	Applicability; description of the no beamhouse subcategory.		

NR 252.01 Purpose. The purpose of this chapter is to establish effluent limitations, standards of performance, and pre-treatment standards for discharges of process wastes from the leather tanning and finishing category of point sources and its subcategories.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.015 Applicability. This chapter applies to any leather tanning and finishing facility which discharges or may discharge process wastewater pollutants to the waters of the state, or which introduces or may introduce process wastewater pollutants into a publicly owned treatment works.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.02 General definitions. In addition to the definitions set forth in 40 CFR Part 401, the following definitions apply to this chapter:

c1d XChrome tanY means the process of converting hide into leather using a form of chromium.

c2d XExisting sourceY means any source that is not a new source.

c3d XHair pulpY means the removal of hair by chemical dissolution.

c4d XHair saveY means the physical or mechanical removal of hair which has not been chemically dissolved, and either selling the hair as a by-product or disposing of it as a solid waste.

c5d XHideY means any animal pelt or skin as received by a tannery as raw material to be processed.

c6d XInterferenceY means the discharge of sulfides in quantities which can result in human health hazards and risks to human life, and an inhibition or disruption of a POTW as defined in 40 CFR 403.3 cid.

c7d XMonthly averageY means the arithmetic average of 8 individual data points from effluent sampling and analysis during any calendar month.

c8d XNew source,Y as defined for PSES and PSNS, means any building, structure, facility, or installation from which there is or may be a discharge of pollutants, the construction of which commenced after June 2, 1982.

c9d XNew source,Y as defined for BPT, BAT, BCT, and NSPS, means any point source the construction of which commenced after January 6, 1983.

c10d XRaw materialY means the hides received by the tannery except for facilities covered by the retan-wet finish-sides and retan-wet finish-splits subcategories where Xraw materialY means the hide or split in the condition in which it is first placed into a wet process.

c11d XRetan-wet finishY means the final processing steps performed on a tanned hide including, but not limited to, the following wet processes: retan, bleach, color, and fat liquor.

c12d XSulfideY means total sulfide as measured by the potassium ferricyanide titration method described in s. NR 252.035 or the modified Monier-Williams method described in s. NR 252.036.

$$\text{Normality of Potassium Ferricyanide} = \frac{\text{cml of thiosulfate added} \times \text{cnormality of thiosulfated}}{\text{MI of K}_3\text{FecCNd}_6}$$

ccd Preparation of 6M ammonium chloride buffer, pH 9.3: Dissolve 200 g. ammonium chloride in approximately 500 ml. distilled water, add 200 ml. 14M reagent grade ammonium hydroxide and make up to one liter with distilled water. The buffer may be prepared in a hood. Store in a tightly stoppered container.

c13d XVegetable tanY means the process of converting hides into leather using chemicals either derived from vegetable matter or synthesized to produce effects similar to those chemicals.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. c12d, Register, May, 2001, No. 545, eff 6-1-01.

NR 252.03 Sulfide analytical method. c1d The potassium ferricyanide titration method described in s. NR 252.035 shall be used whenever practicable for the determination of sulfide in wastewaters discharged by plants operating in all subcategories except the hair save or pulp, non-chrome tan, retan-wet finish section in s. NR 252.30. In all other cases, the modified Monier-Williams method as described in s. NR 252.036 shall be used as an alternative to the potassium ferricyanide titration method for the determination of sulfide in wastewaters discharged by plants operating in all sections except s. NR 252.30.

c2d The modified Monier-Williams method as described in s. NR 252.036 shall be used for the determination of sulfide in wastewaters discharged by plants operating in the hair save or pulp, non-chrome tan, retan-wet finish subcategory pursuant to s. NR 252.30.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; r. and recr. Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.035 Potassium ferricyanide titration method. The following method is based on method SLM 4{2 described in Official Method of Analysis, Society of Leather Trades[Chemists, Fourth Revised Edition, Redbourn, Herts., England, 1965 and is to be used for the determination of sulfide in alkaline wastewater.

c1d OUTLINE OF METHOD. cad The buffered sulfide solution is titrated with standard potassium ferricyanide solution in the presence of a ferrous dimethylglyoxime ammonia complex. The sulfide is oxidized to sulfur. Sulfite interferes and shall be precipitated with barium chloride. Thiosulfate is not titrated under the conditions of the determination.

cbd Apparatus: burette, 10 ml.

c2d REAGENT. cad 0.1 Preparation of 0.02 N potassium ferricyanide; -32.925 g. per liter - this solution must be kept in the dark. Weigh to the nearest tenth of a gram 6.6 g. of analytical reagent grade potassium ferricyanide and dissolve in one liter distilled water. Store in an amber bottle in the dark. Prepare fresh each week.

cbd Standardization of ferricyanide solution: Transfer 50 ml. of solution to a 250 ml. Erlenmeyer flask. Add several crystals of potassium iodide, about one g., mix gently to dissolve, add one ml. of 6N hydrochloric acid, stopper the flask, and swirl gently. Let stand for 2 minutes, add 10 ml. of a 30% zinc sulfate solution, and titrate the mixture containing the gelatinous precipitate with standardized sodium thiosulfate or phenylarsine oxide titrant in the range of 0.025-0.050N. Add one ml. of starch indicator solution after the color has faded to a pale yellow, and continue the titration to the disappearance of the blue color. Calculate the normality of the ferricyanide solution using the equation:

cdd Preparation of 0.05M barium chloride solution: Dissolve 12-13 g. barium chloride dihydrate in one liter of distilled water.

ced Preparation of ferrous dimethylglyoxime indicator solution: Mix 10 ml. 0.6 percent ferrous sulfate, 50 ml. one percent

dimethylglyoxime in ethanol, and 0.5 ml. concentrated sulfuric acid.

cf_d Preparation of stock sulfide standard, 1000 ppm: Dissolve 2.4 g. reagent grade sodium sulfide in one liter of distilled water. Store in a tightly stoppered container. Diluted working standards must be prepared fresh daily and their concentrations determined by EPA test procedure 376.1 csee [40 CFR 136.3](#), Table IB, parameter 66 c49 FR 43234, October 26, 1984, with correction notice at 50 FR 690, January 4, 1985dd immediately prior to use.

cg_d Preparation of 10N NaOH: Dissolve 400 g. of analytical reagent grade NaOH in one liter distilled water.

ch_d Sample preservation and storage: samples are to be field filtered by either gravity or pressure with coarse filter paper, such as Whatman 4 or equivalent, immediately after collection. Filtered samples must be preserved by adjustment to pH > 12 with 10N NaOH. Sample containers must be covered tightly and stored at 4 degrees C until analysis. Samples shall be analyzed within 48 hours of collection. If these procedures cannot be achieved, it is the laboratory[s] responsibility to institute quality control procedures that shall provide documentation of sample integrity.

c3d PROCEDURE. ca_d Transfer 100 ml. of sample to be analyzed, or a suitable portion containing not more than 15 mg. sulfide supplemented to 100 ml. with distilled water, to a 250 ml. Erlenmeyer flask.

cb_d Adjust the sample to pH 8.5-9.5 with 6N HCl.

cc_d Add 20 ml. of 6M ammonium chloride buffer cpH 9.3d, one ml. of ferrous dimethylglyoxime indicator, and 25 ml. of 0.05M barium chloride. Mix gently, stopper, and let stand for 10 minutes.

cd_d After 10 minutes titrate with standardized potassium ferricyanide to disappearance of pink color. The endpoint is reached when there is no reappearance of the pink color after 30 seconds.

ce_d Calculation and reporting of results.

$$\text{mg/l sulfide} = \frac{A \times B \times 1600}{\text{vol. in ml. of sample titrated}}$$

where

A=volume in ml. of potassium ferricyanide solution used, and
B= normality of potassium ferricyanide solution.

Report results to 2 significant figures.

c4d QUALITY CONTROL. ca_d Each laboratory that uses this method is required to operate a formal quality control program. The minimum requirements of this program consist of an initial demonstration of laboratory capability and the analysis of replicate and spiked samples as a continuing check on performance. The laboratory is required to maintain performance records to define the quality of data that is generated. Ongoing performance checks shall be compared with established performance criteria to determine if the results of analyses are within precision and accuracy limits expected of the method.

cb_d Before performing any analyses, the analyst shall demonstrate the ability to generate acceptable precision and accuracy with this method by performing the following operations.

1. Perform 4 replicate analyses of a 20 mg{l sulfide standard prepared in distilled water. See sub. [c2d](#) [cf_d](#).

2. a. Calculate clean water precision and accuracy in accor-

dance with standard statistical procedures. Clean water acceptance limits are presented in subd. [2. b](#). These criteria shall be met or exceeded before sample analyses can be initiated. A clean water standard shall be analyzed with each sample set and the established criteria met for the analysis to be considered under control.

b. Clean water precision and accuracy acceptance limits: for distilled water samples containing from 5 mg{l. to 50 mg{l. sulfide, the mean concentration from 4 replicate analyses shall be within the range of 50 to 110% of the true value.

ccd The method detection limits or MDL may be determined periodically by each participating laboratory in accordance with the procedures specified in YMethods for Chemical Analysis of Municipal and Industrial Wastewater, Y EPA- 660{4-82-057, July 1982, EMSL, Cincinnati, OH 45268. For the convenience of the user, these procedures are contained in s. [NR 252.0365](#).

cdd A minimum of one spiked and one duplicate sample shall be performed for each analytical event, or 5% spikes and 5% duplicates when the number of samples per event exceeds 20. Spike levels are to be at the MDL and at x where x is the concentration found if in excess of the MDL. See par. [ccd](#) for MDL samples. Spike recovery shall be 40 to 120% for the analysis of a particular matrix type to be considered valid. If a sample or matrix type provides performance outside these acceptance limits, the analyses shall be repeated using the modified Monier-Williams procedures described in s. [NR 252.036](#).

ced Report results in mg{liter. When duplicate and spiked samples are analyzed, report all data with the sample results.

History: Cr. Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.036 Modified Monier-Williams method. c1d

OUTLINE OF METHOD. ca_d Hydrogen sulfide is liberated from an acidified sample by distillation and purging with nitrogen gas cN₂d. Sulfur dioxide interference is removed by scrubbing the nitrogen gas stream in a pH 7 buffer solution. The sulfide gas is collected by passage through an alkaline hydrogen peroxide scrubbing solution in which it is oxidized to sulfate. Sulfate concentration in the scrubbing solution is determined by either EPA gravimetric test procedure 375.3 or EPA turbidimetric test procedure 375.4 csee [40 CFR 136.3](#), Table IB, parameter 65 c49 FR 43234, October 26, 1984, and correction notice at 50 FR 690, January 4, 1985dd.

cb_d apparatus see figure 1.d Catalogue numbers are given only to provide a more complete description of the equipment necessary, and do not constitute a manufacturer or vendor endorsement.

Heating mantel and control cVWR Cat. No. 33752-464d

1000 ml. distilling flask with three 24{40 joints cVWR Cat. No. 29280-215d

Friedricks condenser with two 24{40 joints cVWR Cat. No. 23161-009d

125 ml. separatory funnel with 24{40 joint cVWR Cat. No. 30357-102d

Inlet tube with 24{40 joint cVWR Cat. No. 33057-105d


Adapter joint 24{40 to 19{38 cVWR Cat. No. 62905-26d

Adsorber head c2 requiredd cThomas Cat. No. 9849-R29d

Adsorber body c2 requiredd cThomas Cat. No. 9849-R32d

Laboratory vacuum pump or water aspirator

**FIGURE 1
EQUIPMENT ASSEMBLY**

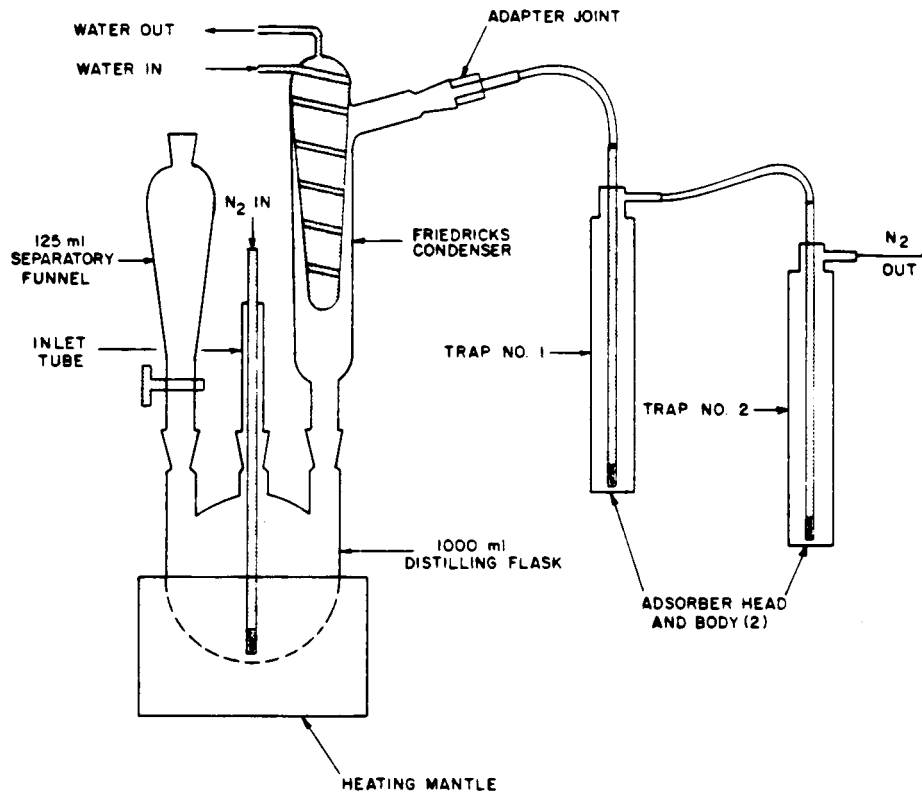

c2d REAGENTS. cad Potassium hydroxide, 6N: Dissolve 340 g. of analytical reagent grade KOH in one liter distilled water.

cbd Sodium hydroxide, 6N: Dissolve 240 g. of analytical reagent grade NaOH in one liter distilled water.

ccd Sodium hydroxide, 0.03N: Dilute 5.0 ml. of 6N NaOH to one liter with distilled water.

cdd Hydrochloric acid, 6N: Dilute 500 ml. of concentrated HCl to one liter with distilled water.

ced Potassium phosphate stock buffer, 0.5M: Dissolve 70 g. of monobasic potassium phosphate in approximately 800 ml. distilled water. Adjust pH to 7.0 ± 0.1 with 6N potassium hydroxide and dilute to 1 liter with distilled water. Stock solution is stable for several months at 4 degrees C.

efd Potassium phosphate buffer, 0.05M: Dilute one volume of 0.5M potassium phosphate stock buffer with 9 volumes of distilled water. Solution is stable for one month at 4 degrees C.

cgd Alkaline 3% hydrogen peroxide: Dilute one volume of 30% hydrogen peroxide with 9 volumes of 0.03N NaOH. Prepare this solution fresh each day of use.

chd Preparation of stock sulfide standard, 1000 ppm.: Dissolve 2.4 g. reagent grade sodium sulfide in one liter of distilled water. Store in a tightly stoppered container. Diluted working standards shall be prepared fresh daily and their concentrations determined by EPA test procedure 376.1 immediately prior to use csee 40 CFR 136.3, Table IB, parameter 66 c49 FR 43234, October 26, 1984, and correction notice at 50 FR 690, January 4, 1985dd.

cid Sample preservation and storage: Preserve unfiltered

wastewater samples immediately after collection by adjustment to pH > 9 with 6N NaOH and addition of 2 ml. of 2N zinc acetate per liter. This amount of zinc acetate is adequate to preserve 64 mg/l. sulfide under ideal conditions. Sample containers shall be covered tightly and stored at 4 degrees C until analysis. Samples shall be analyzed within 7 days of collection. If these procedures cannot be achieved, it is the laboratory's responsibility to institute quality control procedures that will provide documentation of sample integrity.

c3d PROCEDURE. cSee Figure 1 for apparatus layoutd.

cad Place 50 ml. of 0.05M pH 7.0 potassium phosphate buffer in trap no.1.

cbd Place 50 ml. of alkaline 3% hydrogen peroxide in trap no. 2.

ccd Sample introduction and N₂ prepurge: Gently mix sample to be analyzed to resuspend settled material, taking care not to aerate the sample. Transfer 400 ml. of sample, or a suitable portion containing not more than 20 mg. sulfide diluted to 400 ml. with distilled water, to the distillation flask. Adjust the N₂ flow so that the impingers are frothing vigorously, but not overflowing. Vacuum may be applied at the outlet of trap No. 2 to assist in smooth purging. The N₂ inlet tube of the distillation flask shall be submerged deeply in the sample to ensure efficient agitation. Purge the sample for 30 minutes without applying heat. Test the apparatus for leaks during the prepurge cycle using snoop or soap water solution.

cdd Volatilization of H₂S: Interrupt the N₂ flow and vacuum and introduce 100 ml. of 6N HCl to the sample using the separa-

tory funnel. Immediately resume the gas flow and vacuum. Apply maximum heat with the heating mantle until the sample begins to boil, then reduce heat and maintain gentle boiling and N₂ flow for 30 minutes. Terminate the distillation cycle by turning off the heating mantle and maintaining N₂ flow through the system for 5 to 10 minutes. Then turn off the N₂ flow, release vacuum, and cautiously vent the system by placing 50 to 100 ml. of distilled water in the separatory funnel and opening the stopcock carefully. When the bubbling stops and the system is equalized to atmospheric pressure, remove the separatory funnel. Extreme care shall be exercised in terminating the distillation cycle to avoid flash-over, draw-back, or violent steam release.

ced Analyze the contents of trap no. 2 for sulfate according to either EPA gravimetric test procedure 375.3 or EPA turbidimetric test procedure 375.4 csee 40 CFR 136.3, Table IB, parameter 65 c49 FR 43234, October 26, 1984, and correction notice at 50 FR 690, January 4, 1985dd. Use the result to calculate mg{l. of sulfide in wastewater sample.

cfd 1. Calculations and reporting of results

2. Gravimetric procedure:

$$\text{mg sulfide/l} = \frac{(\text{mg BaSO}_4 \text{ collected in Trap No. 2}) \times (137)}{\text{volume in ml. of waste sample distilled}}$$

3. Turbidimetric procedure:

$$\text{mg sulfide/l} = \frac{A \times B \times 333}{C}$$

where A=mg{l of sulfate in trap no. 2

B=liquid volume in liters in trap no. 2

and C=volume in ml of waste sample distilled

4. Report results to 2 significant figures.

c4d QUALITY CONTROL. cad Each laboratory that uses this method shall operate a formal quality control program. The minimum requirements of this program consist of an initial demonstration of laboratory capability and the analysis of replicate and spiked samples as a continuing check on performance. The laboratory shall maintain performance records to define the quality of data that is generated. Ongoing performance checks shall be compared with established performance criteria to determine if the results of analyses are within precision and accuracy limits expected of the method.

cbd Before performing any analyses, the analyst shall demonstrate the ability to generate acceptable accuracy and precision by performing the following operations.

1. Perform 4 replicate analyses of a 20 mg{l. sulfide standard prepared in distilled water. Refer to sub. **c2d chd** under XReagents.Y

2. a. Calculate clean water precision and accuracy in accordance with standard statistical procedures. Clean water acceptance limits are presented in subd. **2.b**. These criteria shall be met or exceeded before sample analyses can be initiated. A clean water standard shall be analyzed with each sample set and the established criteria met for the analyses to be considered under control.

b. Clean water precision and accuracy acceptance limits: for distilled water samples containing from 5 mg{l. to 50 mg{l. sulfide, the mean concentration from 4 replicate analyses shall be within the range of 72 to 114% of the true value.

ccd The method detection limit or MDL may be determined periodically by each participating laboratory in accordance with the procedures specified in YMethods for Chemical Analysis of

Municipal and Industrial Wastewater.Y EPA- 600{4-82-057, July 1982, EMSL, Cincinnati, OH 45268. For the convenience of the user, these procedures are contained in s. **NR 252.0365**.

cdd A minimum of one spiked and one duplicate sample shall be run for each analytical event, or 5% spikes and 5% duplicates when the number of samples per event exceeds 20. Spike levels are to be at the MDL and at x when x is the concentration found if in excess of the MDL. See par. **cdd** for MDL samples. Spike recovery shall be 60 to 120% for the analysis of a particular matrix type to be considered valid.

ced Report all results in mg{liter. When duplicate and spiked samples are analyzed, report all data with the sample results.

History: Cr. Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.0365 Method detection limit method. c1d

DEFINITION. XMethod detection limitY or YMDLY means the minimum concentration of a substance that can be identified, measured and reported with 99% confidence that the analyte concentration is greater than zero and determined from analysis of a sample in a given matrix containing analyte.

c2d SCOPE AND APPLICATION. This procedure is designed for applicability to a wide variety of sample types ranging from reagent or blank water containing analyte to wastewater containing analyte. The MDL for an analytical procedure may vary as a function of sample type. All sample processing steps of the analytical method shall be included in the determination of the MDL. The MDL obtained by this procedure is used to judge the significance of a single measurement of a future sample. The MDL procedure was designed for applicability to a broad variety of physical and chemical methods. To accomplish this, the procedure was made device or instrument independent.

c3d PROCEDURE. cad Make an estimate of the detection limit using one of the following:

1. The concentration value that corresponds to an instrument signal or noise ratio in the range of 2.5 to 5. If the criteria for qualitative identification of the analyte is based upon pattern recognition techniques, the least abundant signal necessary to achieve identification shall be considered in making the estimate.

2. The concentration value that corresponds to 3 times the standard deviation of replicate instrumental measurements for the analyte in reagent water.

3. The concentration value that corresponds to the region of the standard curve where there is a significant change in sensitivity at low analyte concentrations, such as a break in the slope of the standard curve.

4. The concentration value that corresponds to known instrumental limitations.

cbd Prepare reagent or blank water that is as free of analyte as possible. Reagent or interference free water is defined as a water sample in which analyte and interferent concentrations are not detected at the method detection limit of each analyte of interest. Interferences are defined as systematic errors in the measured analytical signal of an established procedure caused by the presence of interfering species or interferent. The interferent concentration is presupposed to be normally distributed in representative samples of a given matrix.

ccd 1. If the MDL is to be determined in reagent or blank water, prepare a laboratory standard such as an analyte in reagent water at a concentration which is at least equal to or in the same concentration range as the estimated MDL. It is recommended to be between one and 5 times the estimated MDL. Proceed to par. **cdd**.

2. If the MDL is to be determined in another sample matrix, analyze the sample. If the measured level of the analyte is in the

recommended range of one to 5 times the estimated MDL, proceed to par. cdd.

3. If the measured concentration of analyte is less than the estimated MDL, add a known amount of analyte to bring the concentration of analyte to between one and 5 times the MDL. In the case where an interference is coanalyzed with the analyte and the measured level of analyte is greater than 5 times the estimated MDL, there are 2 options:

a. Obtain another sample of lower level of analyte in same matrix if possible.

b. The sample may be used as is for determining the MDL if the analyte level does not exceed 10 times the MDL of the analyte in reagent water. The variance of the analytical method changes as the analyte concentration increases from the MDL, hence the MDL determined under these circumstances may not truly reflect method variance at lower analyte concentrations.

cdd 1. Take a minimum of 7 aliquots of the sample to be used to calculate the MDL and process each through the entire analytical method. Make all computations according to the defined method with final results in the method reporting units. If blank measurements are required to calculate the measured level of analyte, obtain separate blank measurements for each sample aliquot analyzed. The average blank measurement is subtracted from the respective sample measurements.

2. It may be economically and technically desirable to evaluate the estimated MDL before proceeding with subd.1. This will prevent repeating this entire procedure when the costs of analyses are high and insure that the procedure is being conducted at the correct concentration. It is quite possible that an incorrect MDL can be calculated from data obtained at many times the real MDL even though the background concentration of analyte is less than 5 times the calculated MDL. To insure that the estimate of the MDL is a good estimate, it is necessary to determine that a lower concentration of analyte will not result in a significantly lower MDL. Take 2 aliquots of the sample to be used to calculate the MDL and process each through the entire method, including blank measurements as described in subd.1. Evaluate these data:

a. If these measurements indicate the sample is in the desirable range for determining the MDL, take 5 additional aliquots and proceed. Use all 7 measurements to calculate the MDL.

b. If these measurements indicate the sample is not in the correct range, reestimate the MDL, obtain new sample as in par. ccd and repeat either subd.1. or 2.

ced Calculate the variance cS^2d and standard deviation cSd of the replicate measurements, as follows:

$$S^2 = \frac{1}{n-1} \left[\sum_{i=1}^n x_i^2 - \frac{\left(\sum_{i=1}^n x_i \right)^2}{n} \right] + (s^2)^{0.5}$$

where: the x_i , $i = 1$ to n are the analytical results in the final method reporting units obtained from the n sample aliquots and

$$\sum_{i=1}^n x_i^2$$

refers to the sum of the X values from $i = 1$ to n .

cf 1. Compute the MDL as follows:

$$MDL = t_{cn-1, 1-a} \cdot cSd$$

where:

MDL=the method detection

$t_{cn-1, 1-a}$ =the students[t value appropriate for a 99% con-

fidence level and a standard deviation estimate with $n-1$ degrees of freedom as given in subd. 2.

S =standard deviation of the replicate analyses.

2. The 95% confidence limits for the MDL derived in subd. 1. are computed according to the following equations derived from percentiles of the chi square over degrees of freedom distribution $cX2\{dfd$ and calculated as follows:

$$MDLLCL=0.69 MDL$$

$MDLUCL=1.92 MDL$ where $MDLLCL$ and $MDLUCL$ are the lower and upper 95% confidence limits respectively based on 7 aliquots.

cgd 1. Optional iterative procedure to verify the reasonableness of the estimated MDL and calculated MDL of subsequent MDL determinations.

2. If this is the initial attempt to compute MDL based on the estimated MDL in par. cad, take the MDL as calculated in par. cfd, spike in the matrix at the calculated MDL and proceed through the procedure starting with par. cdd1.

3. If the current MDL determination is an iteration of the MDL procedure for which the spiking level does not permit qualitative identification, report the MDL as that concentration between the current spike level and the previous spike level which allows qualitative identification.

4. If the current MDL determination is an iteration of the MDL procedure and the spiking level allows qualitative identification, use S_A^2 from the current MDL calculation and S_B^2 from the previous MDL calculation to compute the F ratio.

$$\frac{S_A^2}{S_B^2} < 3.05$$

if

then compute the pooled standard deviation by the following equation:

$$S_{pooled} = \frac{[6S_A^2 + 6S_B^2]^{0.5}}{12}$$

$$\frac{S_A^2}{S_B^2} > 3.05$$

if

respoke at the last calculated MDL and process the samples through the procedure starting with par. cdd.

5. Use the S_{pooled} as calculated in subd. 3. to compute the final MDL according to the following equation:

$$MDL=2.681 \cdot cS_{pooled}$$

where 2.681 is equal to $t_{c12, 1-a}$ =.99d

6. The 95% confidence limits for MDL derived in subd. 4. are computed according to the following equations derived from percentiles of the chi squared over degrees of freedom distribution.

$$MDLLCL=0.72 MDL$$

$$MDLUCL=1.65 MDL$$

where LCL and UCL are the lower and upper 95% confidence limits respectively based on 14 aliquots.

c4d REPORTING. The analytical method used shall be specifically identified by number or title and the MDL for each analyte expressed in the appropriate method reporting units. If the analytical method permits options which affect the method detection limit, these conditions shall be specified with the MDL value. The sample matrix used to determine the MDL shall also be identified with the MDL value. Report the mean analyte level with the MDL. If a laboratory standard or a sample that contained a known amount analyte was used for this determination, report the

mean recovery and indicate if the MDL determination was iterated. If the level of the analyte in the sample matrix exceeds 10 times the MDL of the analyte in reagent water, do not report a value for the MDL.

c5d REFERENCE. Glaser, J.A., Foerst, D.L., McKee, G.D., Quave, S.A., and Budde, W.L., XTrace Analysis for Wastewaters, *Y Environmental Science and Technology*, 15, 1426 c1981d.

c6d TABLE OF STUDENTS[T-VALUES AT THE 99% CONFIDENCE LEVEL.

Number of replicates	Degrees of freedom cn-1d	t cn-1, 1-a= .99d
7.....	6	3.143
8.....	7	2.998
9.....	8	2.896
10.....	9	2.821
11.....	10	2.764
16.....	15	2.602
21.....	20	2.528
26.....	25	2.485
31.....	30	2.457
61.....	60	2.390
		2.326

History: Cr. Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.04 Applicability of sulfide pretreatment standards. c1d A POTW receiving wastewater from a facility subject to this chapter may require more stringent pretreatment standards for sulfide than those established by this chapter without EPA approval.

c2d The pretreatment standards for sulfide established by this chapter will not apply if the POTW receiving wastewater from a facility subject to this chapter certifies in writing with explanation of relevant factors considered, in accordance with the provisions of sub. **c3d** that the discharge of sulfide from the facility does not interfere with the operation of the POTW. In making this determination, the POTW shall consider all relevant factors including but not limited to the following:

cad The presence and characteristics of other industrial wastewaters which can increase or decrease sulfide concentrations, pH, or both.

cbd The characteristics of the sewer{interceptor collection system which either minimize or enhance opportunities for release of hydrogen sulfide gas.

ccd The characteristics of the receiving POTW[s headworks, preliminary and primary treatment systems, and sludge holding and dewatering facilities which either minimize or enhance opportunities for release of hydrogen sulfide gas.

cdd The occurrence of any prior sulfide related interference as defined in s. **NR 252.02 c5d**.

c3d cad On October 13, 1983, a POTW which intends to certify that the sulfide pretreatment standard does not apply shall publish, in a local newspaper with the largest circulation, a notice that presents the findings supporting this determination consistent with sub. **c1d**. Allowance for public hearing of these findings shall be provided. The POTW shall identify all existing facilities to which the sulfide pretreatment standard otherwise established by this chapter would not apply.

cbd On January 11, 1984, a POTW which intends to certify that the sulfide pretreatment standard does not apply shall file a written certification with the Regional Water Management Division Director, Environmental Protection Agency, in the appropriate

regional office. This certification shall include the findings supporting this determination and the results of public comments, and public hearing if held.

ccd On February 10, 1984, EPA shall acknowledge to the POTW receipt of any certification submitted under pars. **cad** and **cbd**, and shall indicate to the POTW the adequacy of the submission based upon a review of the factors set forth in sub. **c2d**.

cdd Within 30 days of the date of receipt of adequate submissions under pars. **cad** to **ccd**, EPA shall publish a notice in the federal register identifying those facilities to which the sulfide pretreatment standards of this part do not apply.

ced A POTW may certify that the sulfide pretreatment standards of this chapter do not apply to a new source planning to discharge into the POTW. This certification shall be submitted prior to the commencement of discharge, and shall conform at a minimum with criteria in sub. **c2d** and the general procedures and intervals of time contained in pars. **cad** to **cdd**.

c4d APPLICABILITY OF SULFIDE PRETREATMENT STANDARDS. **cad** If, after EPA and the POTW have determined in accordance with this section that the sulfide pretreatment standards of this chapter are not applicable to specified facilities, a POTW then determines that there have been changed circumstances which justify application of the sulfide pretreatment standards, the POTW shall revoke the certification submitted under sub. **c3d**. Circumstances include, but not are not limited to, changes in the factors specified in sub. **c2d**. The POTW and EPA shall then adhere to the general procedures and time intervals contained in sub. **c3d** in order to determine whether the sulfide pretreatment standards contained in this chapter are applicable.

cbd If pursuant to par. **cad** the sulfide pretreatment standards of this chapter are applicable to a specified facility, the indirect discharger shall comply with the sulfide pretreatment standards no later than 18 months from the date of publication of the federal register notice identifying the facility.

ccd At any time after October 13, 1983, if a POTW determines that there have been changed circumstances which include, but are not limited to, changes in the factors specified in sub. **c2d**, it may initiate proceedings contained in sub. **c3d** to determine that the sulfide pretreatment standards of this section shall not be applicable. The POTW and EPA shall follow the procedures and time intervals contained in sub. **c3d** to make this determination. A final determination that the sulfide pretreatment standards are not applicable shall be made prior to the discharge of sulfide not in accordance with the standards set forth in this chapter.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; cr. c4d, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.05 Compliance date for pretreatment standards for existing sources cPSESd. Existing sources subject to PSES shall comply by November 25, 1985.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.06 Monitoring requirements. Compliance with monthly average discharge limitations is required regardless of the number of samples analyzed and averaged.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.10 Applicability; description of the hair pulp, chrome tan, retan-wet finishing subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which, either exclusively or in addition to other unhairing and tanning operation, processes raw or cured cattle or cattle-like hides into finished leather by chemically dissolving the hide hair, chrome tanning, and retan-wet finishing.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.11 Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	9.3	4.2
TSS	13.4	6.1
Oil and grease	3.9	1.7
Total chromium	0.24	0.09
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.12 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd: The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.11.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.13 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd: The effluent limitations are those for total chromium contained in s. NR 252.11.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.14 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cN-SPSd:

Pollutant or pollutant property	NSPS Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	6.0	2.7
TSS	8.7	4.0
Oil and grease	2.5	1.1
Total chromium	0.16	0.06
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.15 Pretreatment standards for existing sources cPSESd. c1d Except as provided in s. NR 252.04 and 40 CFR 403.7 and 403.13, any existing source subject to this subcategory which introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES Milligrams per liter cmg{ld	
	Maximum for any 1 day	Maximum for monthly average
Sulfide	24.0
Total chromium	12.0	8.0
pH	c1d	c1d

¹Not less than 7.0.

c2d Any existing source subject to this subcategory which processes less than 275 hides{ day shall comply with sub. c1d, except that the total chromium limitations contained in sub. c1d do not apply.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.16 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7 and s. NR 252.04, any new source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.15.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.20 Applicability; description of the hair save, chrome tan, retan-wet finish subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which processes raw or cured cattle or cattle-like hides into finished leather by hair save unhairing, chrome tanning, and retan-wet finishing.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.21 Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	8.2	3.7
TSS	11.8	5.4
Oil and grease	3.4	1.5
Total chromium	0.21	0.08
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.22 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.21.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.23 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any

existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd: The effluent limitations are those for total chromium contained in s. NR 252.21.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.24 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cNSPSd:

Pollutant or pollutant property	NSPS	
	Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	6.9	3.1
TSS	9.9	4.5
Oil and grease	2.9	1.3
Total chromium	0.18	0.06
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.25 Pretreatment standards for existing sources cPSESd. Except as provided in s. NR 252.04 and 40 CFR 403.7 and 403.13, any existing source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES	
	Milligrams per liter cmg{1d	
	Maximum for any 1 day	Maximum for monthly average
Sulfide	24.0
Total chromium	12.0	8.0
pH	c ¹ d	c ¹ d

¹Not less than 7.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.26 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7 and s. NR 252.04, any new source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.25.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.30 Applicability; description of the hair save or pulp, nonchrome tan, retan-wet finish subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which processes raw or cured cattle or cattle-like hides into finished leather by hair save or pulp unhairing, vegetable tanning or alum, syntans, oils and other agents for tanning, and retan-wet finishing.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.31 Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations	
	Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	6.7	3.0
TSS	9.7	4.4
Oil and grease	2.8	1.3
Total chromium	0.17	0.06
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.32 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.31.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.33 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. The effluent limitations are those for total chromium contained in s. NR 252.31.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.34 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cNSPSd:

Pollutant or pollutant property	NSPS	
	Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	5.9	2.7
TSS	8.5	3.9
Oil and grease	2.4	1.1
Total chromium	0.15	0.06
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.35 Pretreatment standards for existing sources cPSESd. c1d Except as provided in s. NR 252.04 and 40 CFR 403.7 and 403.13, any existing source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES	
	Milligrams per liter cmg{1d	
	Maximum for any 1 day	Maximum for monthly average
Sulfide	24.0
Total chromium	12.0	8.0
pH	c ¹ d	c ¹ d

¹Not less than 7.0.

c2d Any existing source subject to this subcategory which processes less than 350 hides/day shall comply with s. NR 252.35 c1d, except that the total chromium limitations contained in sub. c1d do not apply.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.36 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7 and s. NR 252.04 any new source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.35.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.40 Applicability; description of the retan-wet finish-sides subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which processes previously tanned hides and skins cgrain side onlyd into finished leather by retan-wet finishing.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.41 Effluent limitations representing the degree of effluent reduction attainable by the control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations	
	Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	8.9	4.0
TSS	12.8	5.8
Oil and grease	3.7	1.7
Total chromium	0.23	0.08
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.42 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.41.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.43 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. The effluent limitations are those for total chromium contained in s. NR 252.41.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.44 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cNSPSd:

Pollutant or pollutant property	NSPS	
	Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	6.5	2.9
TSS	9.3	4.3
Oil and grease	2.7	1.2
Total chromium	0.17	0.06
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.45 Pretreatment standards for existing sources cPSESd. Except as provided in 40 CFR 403.7 and 403.13, any existing source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES	
	Milligrams per liter cmg{ld	
	Maximum for any 1 day	Maximum for monthly average
Total chromium	19.0	12.0
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 10.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.46 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7, any new source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.45.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.50 Applicability; description of the no beamhouse subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which processes cattle hides, sheepskins, or splits chair previously removed and pickledd into finished leather by chrome or nonchrome tanning, and retan-wet finishing.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.51 Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations	
	Kg{kkg cor pounds per 1000 lbd or raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	8.0	3.6
TSS	11.6	5.3
Oil and grease	3.4	1.5
Total chromium	0.21	0.08
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.52 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional control technology cBCTd. The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.51.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.53 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. The effluent limitations are those for total chromium contained in s. NR 252.51.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.54 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cN-SPSd:

Pollutant or pollutant property	NSPS	
	KG{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	5.3	2.4
TSS	7.7	3.5
Oil and grease	2.2	1.0
Total chromium	0.14	0.05
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.55 Pretreatment standards for existing sources cPSESd. Except as provided in 40 CFR 403.7 and 403.13, any existing source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES	
	Milligrams per liter cm,g{ld	
	Maximum for any 1 day	Maximum for monthly average
Total chromium	19.0	12.0
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 10.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.56 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7, any new source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.55.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.60 Applicability; description of the through-the-blue subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which processes raw or cured cattle or cattle-like hides through-the-blue tanned state by hair pulp unhairing and chrome tanning; no retan-wet finishing is performed.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.61 Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations	
	Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	3.2	1.5
TSS	4.7	2.1
Oil and grease	1.4	0.61
Total chromium	0.08	0.03
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.62 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.61.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.63 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available tech-

nology economically achievable cBATd. The effluent limitations are those for total chromium contained in s. NR 252.61.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.64 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cNPSd:

Pollutant or pollutant property	NPS	
	Maximum for any 1 day	Maximum for monthly average
	Kg{kg cor pounds per 1000 lbd of raw material	
BOD ₅	3.0	1.3
TSS	4.3	1.9
Oil and grease	1.2	0.55
Total chromium	0.08	0.03
pH	c'd	c'd

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.65 Pretreatment standards for existing sources cPSESd. Except as provided in s. NR 252.04 and 40 CFR 403.7 and 403.13, any existing source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES	
	Milligrams per liter cmg{ld	
	Maximum for any 1 day	Maximum for monthly average
Sulfide	24.0
Total chromium	12.0	8.0
pH	c'd	c'd

¹Not less than 7.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.66 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7 and s. NR 252.04, any new source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.65.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.70 Applicability; description of the shearing subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which processes raw or cured sheep or sheep-like skins with the wool or hair retained into finished leather by chrome tanning, and retan-wet finishing.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.71 Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations	
	Maximum for any 1 day	Maximum for monthly average
	Kg{kg cor pounds per 1000 lbd of raw material	
BOD ₅	15.0	6.8
TSS	21.7	9.9
Oil and grease	6.3	2.8
Total chromium	0.39	0.14
pH	c'd	c'd

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.72 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.71.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.73 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. The effluent limitations are those for total chromium contained in s. NR 252.71.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.74 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cNPSd:

Pollutant or pollutant property	NSPS	
	Kg{kg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	13.2	5.9
TSS	19.1	8.7
Oil and grease	5.6	2.5
Total chromium	0.34	0.12
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.75 Pretreatment standards for existing sources cPSESd. Except as provided in 40 CFR 403.7 and 403.13, any existing source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES	
	Milligrams per liter cmg{ld	
	Maximum for any 1 day	Maximum for monthly average
Total chromium	19.0	12.0
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 10.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.76 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7, any new source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.75.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.80 Applicability; description of the pigskin subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which processes raw or cured pigskins into finished leather by chemically dissolving or pulping the hair and tanning with chrome, then retan-wet finishing.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.81 Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations	
	Maximum for any 1 day	Maximum for monthly average
	Kg{kg cor pounds per 1000 lbd of raw material	
BOD ₅	7.0	3.2
TSS	10.1	4.6
Oil and grease	3.0	1.3
Total chromium	0.18	0.07
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.82 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.81.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.83 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. The effluent limitations are those for total chromium contained in s. NR 252.81.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.84 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cNPSd:

Pollutant or pollutant property	NSPS	
	Maximum for any 1 day	Maximum for monthly average
	Kg{kg cor pounds per 1000 lbsd of raw material	
BOD ₅	5.8	2.6
TSS	8.3	3.8
Oil and grease	2.4	1.1
Total chromium	0.15	0.05
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.85 Pretreatment standards for existing sources cPSESd. Except as provided in s. NR 252.04 and 40 CFR 403.7 and 403.13, any existing source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES	
	Milligrams per liter cmg{ld	
	Maximum for any 1 day	Maximum for monthly average
Sulfide	24.0
Total chromium	12.0	8.0
pH	c ¹ d	c ¹ d

¹Not less than 7.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.86 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7 and s. NR 252.04, any new source subject to this subcategory that introduces process wastewater pollutants into a publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.85.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.90 Applicability; description of the retan-wet finish-splits subcategory. The provisions of this subcategory are applicable to process wastewater discharges resulting from any tannery which processes previously unhaird and tanned splits into finished leather by retan-wet finishing.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.91 Effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best practicable control technology currently available cBPTd:

Pollutant or pollutant property	BPT limitations	
	Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	5.8	2.6
TSS	8.3	3.8
Oil and grease	2.4	1.1
Total chromium	0.15	0.05
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. Table, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.92 Effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best conventional pollutant control technology cBCTd. The effluent limitations are those for BOD₅, TSS, oil and grease, and pH contained in s. NR 252.91.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.93 Effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. Except as provided in 40 CFR 125.30-125.32, any existing point source subject to this subcategory shall achieve the following effluent limitations representing the degree of effluent reduction attainable by the application of the best available technology economically achievable cBATd. The effluent limitations are those for total chromium contained in s. NR 252.91.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.94 New source performance standards cN-SPSd. Any new source subject to this subcategory shall achieve the following new source performance standards cNSPSd:

Pollutant or pollutant property	NSPS	
	Kg{kkg cor pounds per 1000 lbd of raw material	
	Maximum for any 1 day	Maximum for monthly average
BOD ₅	3.5	1.6
TSS	5.1	2.3
Oil and grease	1.5	0.66
Total chromium	0.09	0.03
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 9.0.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.95 Pretreatment standards for existing sources cPSESd. c1d Except as provided in 40 CFR 403.7 and 403.13, any existing source subject to this subcategory that introduces process wastewater pollutants into publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the following pretreatment standards:

Pollutant or pollutant property	PSES	
	Maximum for any 1 day	Maximum for monthly average
	Milligrams per liter cmg{lbd	
Total chromium	19.0	12.0
pH	c ¹ d	c ¹ d

¹Within the range 6.0 to 10.0.

c2d Any existing source subject to this subcategory which processes less than 3,600 splits{day shall comply with sub. c1d, except that the total chromium limitations contained in sub. c1d do not apply.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86; am. c2d, Register, May, 2001, No. 545, eff. 6-1-01.

NR 252.96 Pretreatment standards for new sources cPSNSd. Except as provided in 40 CFR 403.7, any new source subject to this subcategory that introduces process wastewater pollutants into publicly owned treatment works shall comply with 40 CFR Part 403, and achieve the pretreatment standards contained in s. NR 252.95.

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.

NR 252.99 Cross-references. The federal citations in this chapter correspond to provisions of the Wisconsin administrative code and Wisconsin statutes. The federal citations can be cross-referenced in the following table:

<u>Code of Federal Regulations</u>	<u>Corresponding state code section</u>
40 CFR Part 425.....	ch. NR 252 s. NR 211.14, s. 283.13 c3d,
40 CFR 125.30 - 125.32	Stats.
40 CFR Part 401.....	chs. NR 205, 215, 219
40 CFR 403.3 cid.....	s. NR 211.03 c5d
40 CFR 403.7.....	s. NR 211.13
40 CFR 403.13.....	s. NR 211.14

History: Cr. Register, October, 1986, No. 370, eff. 11-1-86.